


4000 Series video door entry system 1 user (2 monitors), 1 entrance

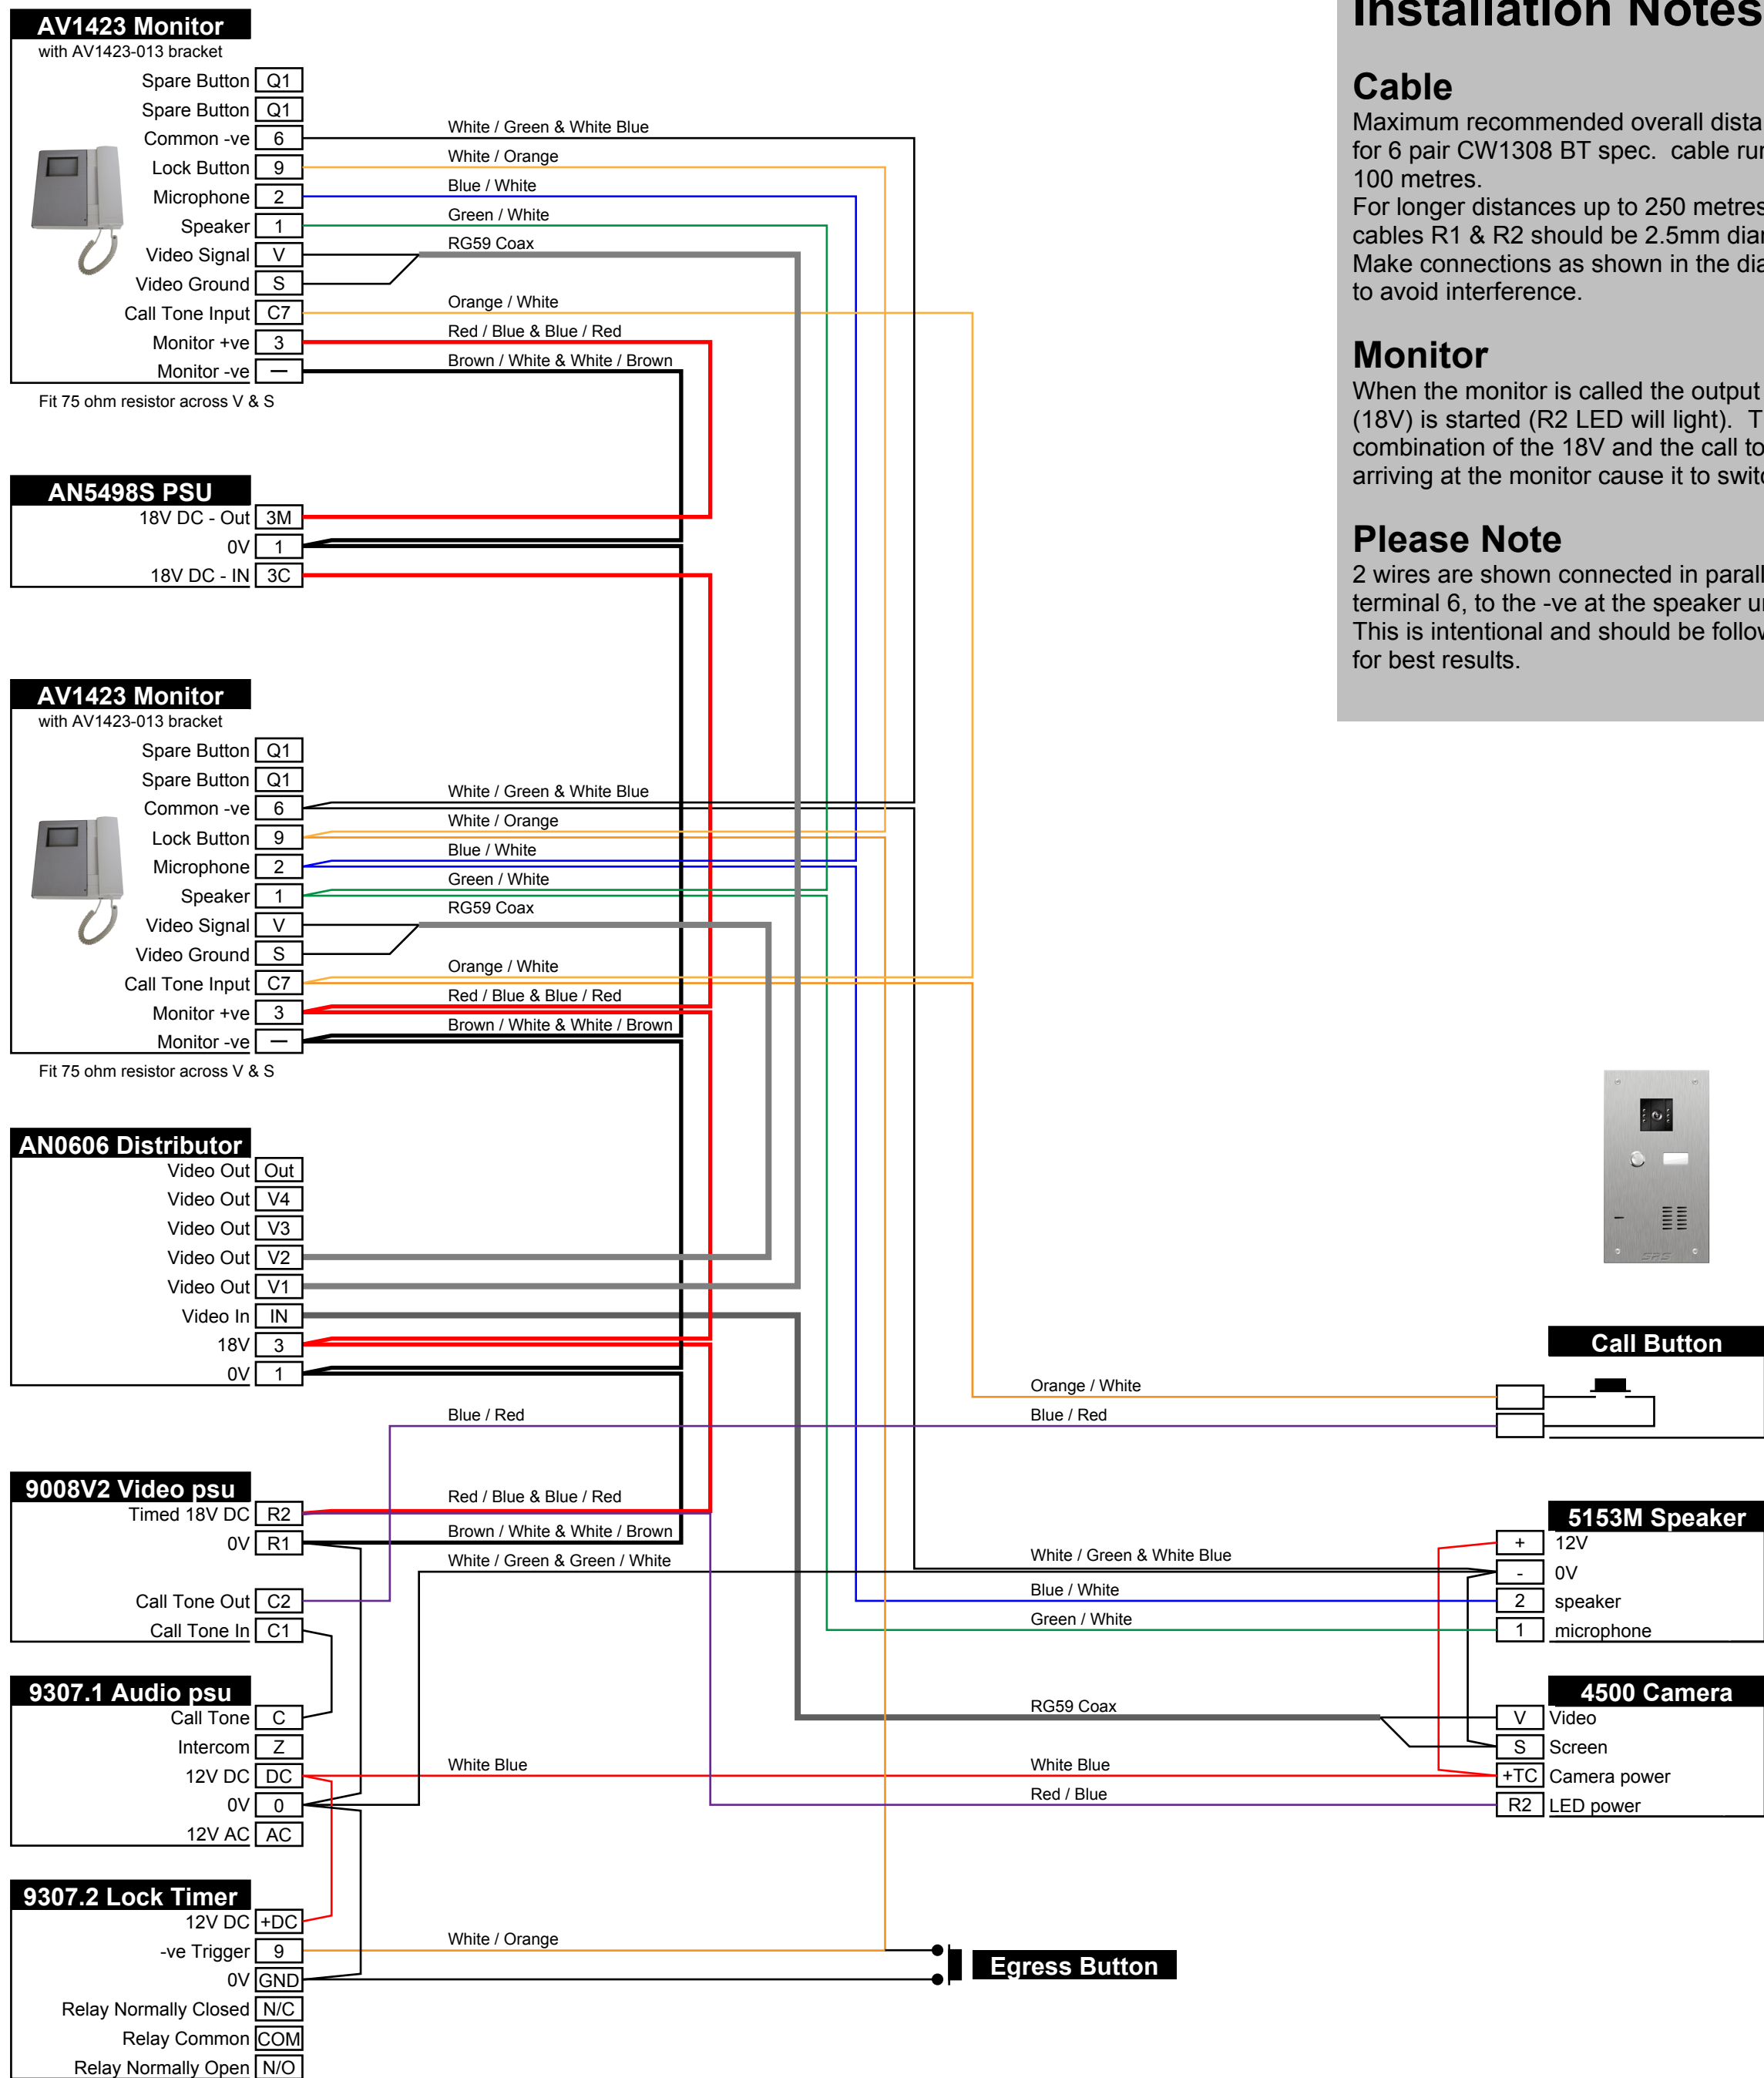

Installation Notes

Cable

Maximum recommended overall distance for 6 pair CW1308 BT spec. cable run is 100 metres. For longer distances up to 250 metres the cables R1 & R2 should be 2.5mm diameter. Make connections as shown in the diagram to avoid interference.

Monitor

When the monitor is called the output R2 (18V) is started (R2 LED will light). The combination of the 18V and the call tone arriving at the monitor cause it to switch on.


Please Note

2 wires are shown connected in parallel for terminal 6, to the -ve at the speaker unit. This is intentional and should be followed for best results.


Locking Options

Note : 9307.1 provides MAX 500mA 12V AC or 12V DC for lock - Replace 9307.1 connections for alternative PSU if more current is required


12V DC Fail Locked

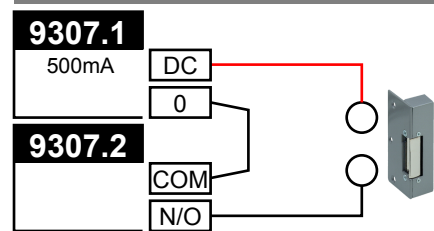

12V AC Fail Locked

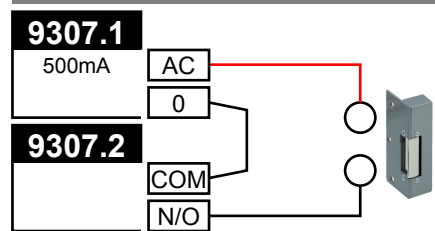

12V DC Fail Open

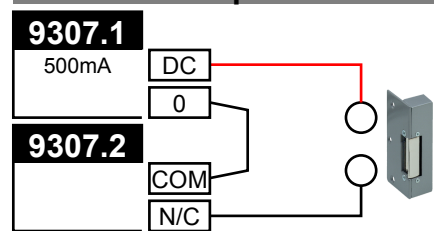

Volt Free

